



## WIN PLAY SWING WP 1422-1

SWING

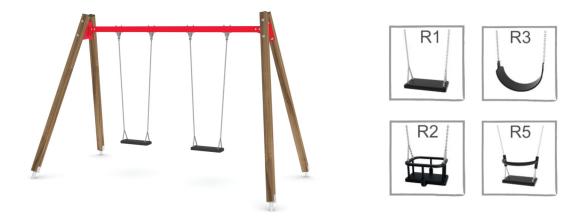

| Device Specifications              |                      |
|------------------------------------|----------------------|
| Safety zone                        | 21,50 m <sup>2</sup> |
| Lenght                             | 3,61 m               |
| Width                              | 1,94 m               |
| Total height                       | 2,33 m               |
| Free fall height                   | 1,30 m               |
| Age group                          | 1-3/3-14 years       |
| In accordance w/ EN standards      | 1176-1:2017          |
| Weight of the heaviest part [kg]   | 25                   |
| Dimension of the biggest part [cm] | 302x30x30            |
| Availability of spare parts        | Yes                  |
|                                    |                      |

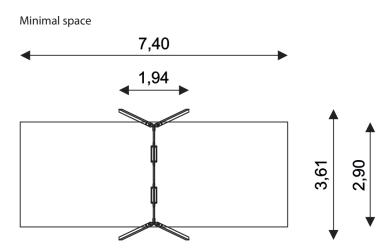

## Material specification:

- 90x90 mm main construction made of impregnated, laminated wood of pine;
- Top of the construction is secured with polyethylene caps to protect the wood surface from atmospheric conditions;
- Metalanchors are made of hot dip galvanized steel, protecting the wood from directcontact with the ground to prevent rot and extending the product's life;
- Stainless steel screws or screws covered with plastic caps;
- No sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;

## Additional information:

- The equipment is certified by an accrediting organization or by certificate of conformity;
- Depth of foundations on a flat surface : 80/70/60 cm;
- The equipment is designed for public playgrounds; The equipment render is of an illustrative nature and shows only the general specification of the equipment, but not its actual appearance. The colours may differ from those demonstrated on render.
- · Available with different seat options: R1 flat seat, R2 cradle seat, R3 belt seat, R5 flat with back rest;

## Surfaces:

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: sand with minimal layer thickness of 30 cm (A,C), synthetic material approved for free fall of 1,30 m (A,B,C)