



WIN PLAY CASTILLO 3080

PLAYGROUND EQUIPMENT

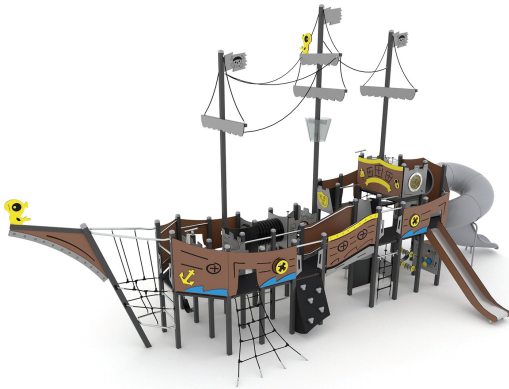

| Device Specifications | |
|------------------------------------|---------------------|
| Safety zone | 92,3 m ² |
| Lenght | 1259 cm |
| Width | 584 cm |
| Total height | 640 cm |
| Free fall height | 270 cm |
| Age range | 4 - 14 years |
| In accordance with EN standard | 1176-1:2017 |
| Weight of the heaviest part [kg] | 42 |
| Dimension of the biggest part [cm] | 265x180x270 |
| Availability of spare parts | Yes |

Minimal space

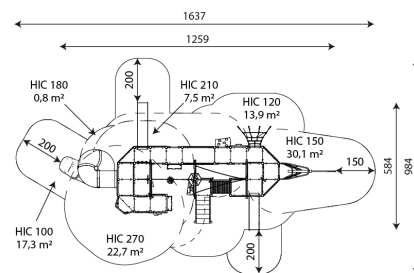

MATERIAL SPECIFICATION

- Steel structure with a profile of 80 x 80 mm, powder galvanized and powder coated or made of stainless steel,
- Platforms, climbing walls and steps made of durable anti-slip and waterproof HPL plates
- Side panels, music panel, mobing objects and flags made of HDPE plate, resistant to weather conditions,
- Transparent polycarbonate panels resistant to scratches and weather conditions,
- Screws covered with plastic caps or stainless steel screws,
- Stainless steel bars, ladders and handrails,
- Tubular sled made of plastic elements, slide made of stainless steel with HDPE side panels,
- Steel ropes in PP braid, connected with durable plastic elements, stainless steel or aluminum,
- Rubber or polypropylene PP, safe end caps on top of the structure,
- Attested, safe seats; calibrated stainless steel chains, preventing fingers entrapment,
- Screws covered with plastic caps or stainless steel screws.

ADDITIONAL COMMENTS

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

SURFACES

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: sand with minimal layer thickness of 40 cm (A), synthetic material approved for free fall of 2,70 m (A,B,C).