

Product technical sheet

JUMPOO 2214








4 - 15 years

1 kids

33,5 m²

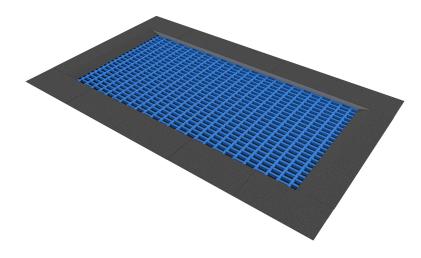



Material specification

- Construction made of hot-dip galvanised steel, mounted below the ground surface,
- The edges of the structure covered with a rubber rim surface colored SBR glued to the frame,
- Jumping mat: made of polyamide lamellas, threaded on a stainless steel rope,
- Fastening on durable galvanized springs inside the structure,



Facilitating disability



easy access



Physical development




balance



community

15/12/2021







Product technical sheet

JUMPOO 2214

Product data

Length	250 cm	
Width	150 cm	
Age group	4 - 15 years	
Number of users	1 kids	
Safety zone	33,5 m2	
Free fall height	90 cm	
In accordance with norm EN	1176-1:2017	
Availability of spare parts	YES	
Color options		

Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Guarantee



30 year guarantee -Structural strength of steel and stainless steel components



15 year guarantee -Structural failure of steel and stainless steel, for dynamic equipment



10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components



5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A.C.)	Particle size from 20	30	≤200
bark (A,C)	to 80	40	≤300
woodshins (A.C.)	Particle size from 5	30	≤200
woodchips (A,C) to 30	40	≤300	
cand or gravel (A.C.)	sand or gravel (A,C) Particle size from 0,25 to 8	30	≤200
Salid of graver (A,C)		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		90

Product technical sheet

JUMPOO 2214

Amount of safe surface corresponding with free fall height:

HIC 90 33,5 m²

Data is subject to change without prior notice.

